


Note: Structural Strength of Truss & Wall NOT Responsibility of Mat Hoisto Manufacturer.

6' to 10'
Between Joist

Movable on beam.
Position determined
by suspension points

Mat Hoisto I-Beam Frame
(Top Flange)

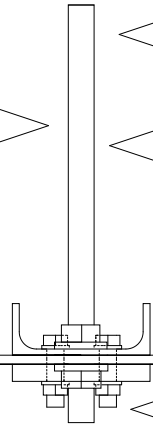

Joins CL-7 suspension clamps
View drawings MH500-06,07

Units' 3/4"x 18" Grade B7 All
Thread Rod Attached to
Suspension Clamp or Structural
Steel. Two included per each
CL-5 unit clamp

CL-5 Unit Clamp

1/2" Grade 8 Bolt With
Nut and Lock Washer
included

20' Mat Hoisto I-Beam Frame

NGE Inc.
P.O. Box 370/Industrial Park
302 North Erickson
Roland, IA 50236

Mat Hoisto 500
CL-5 Clamp
MH500-05

Phone: (515)-388-4118
Fax: (515) 388-4340
Email: mathoist@mathoist.com
Website: www.mathoist.com